

5-in-1 Evacuation sign

Data Sheet

For Series: OT-ES809-Standard



OTC IND CO., LTD

TEL: 0086-575-82913009 | Website: www.otcenterprise.com | Email: info@otcind.net



Dear partners,

* Thanks for Choosing OTC LED emergency products for your projects.

OTC always pursue high quality, steady quality products, competitive price and one-stop customer service, and offer enjoyable installation experience.

* All the OTC emergency lamp with 5 years quality guarantee (Battery 3 years) . If any doubts/ questions, please contact OTC project support team directly by email support@otcind.net . You will get solutions in 7~24 hours rapidly.

Contents

| | |
|---------------------------------------|----|
| 1 Security realated information | 2 |
| 2 Packing list | 2 |
| 3 Basic Parameters | 3 |
| 4 General construction | 4 |
| 4# Rest mode and storage | 4 |
| 5 Emergency function & Wiring | 5 |
| 6 Installation guide | 6 |
| 7 EM inspection record table | 9 |
| 8 Cheap solutions DIY | 10 |

1 Security related information

- Installation should be carried out in accordance with the latest edition of the I.E.E. Wiring regulations and taking into consideration the latest building regulations.
- Ensure that all electrical connections are tight with no loose strands, including factory made connections.
- Ensure there is adequate free air circulation of at least 100mm around the luminaire. It is the installer's responsibility to consider fire risk and take appropriate precautions.
- A separate enclosure may be required if this unit is to be used in dusty and wet environments.


Q.C. date label, installation in an improper working environment or installation not according to the current edition of the I.E.E. Wiring Regulations . The guarantee is also invalidated if the luminaire has been I.R. tested. Should this product fail during the guarantee period it will be replaced free of charge, subject to correct installation and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected. We reserve the right to alter specifications without prior notice.

2 Packing list




3 Basic Parameters

| | |
|-----------------------|------------------------------------|
| Model | Art Nr. OT- ES809 |
| | Standard |
| Material | Polycarbonate + PMMA |
| LED Chips | 20pcs SMD 4014 |
| Degree of protection | IP20 |
| Input Voltage | AC200- 240V 50/60HZ |
| Input power | 2.5W |
| Power factor | >0.5 |
| Emergency change over | <0.5S |
| Emergency mode | Maintained only |
| LED lifespan | 50,000 hrs |
| Guarantee | 5 years (Battery 3 years) |
| Emergency Standard | 60598 - 2- 22:2021 |
| Legend stanrdard | ISO 7010:2019 |
| The Photonetic | ISO 3864 - 4:2011 / EN 1838 - 2013 |
| Emergency Pack | 3.6V 0.6Ah |
| Emergency time | 3 Hours |
| Test | Manual Test |
| Charging indicator | Green |
| Charging details | 60mA, Full charged in 12 hours |
| Luminous Flux(Mains) | 50LM |
| Luminous Flux(EM) | 50LM |

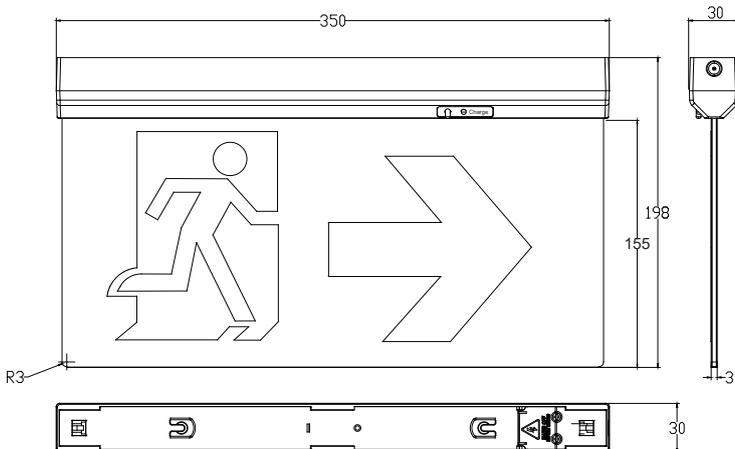

4 General construction

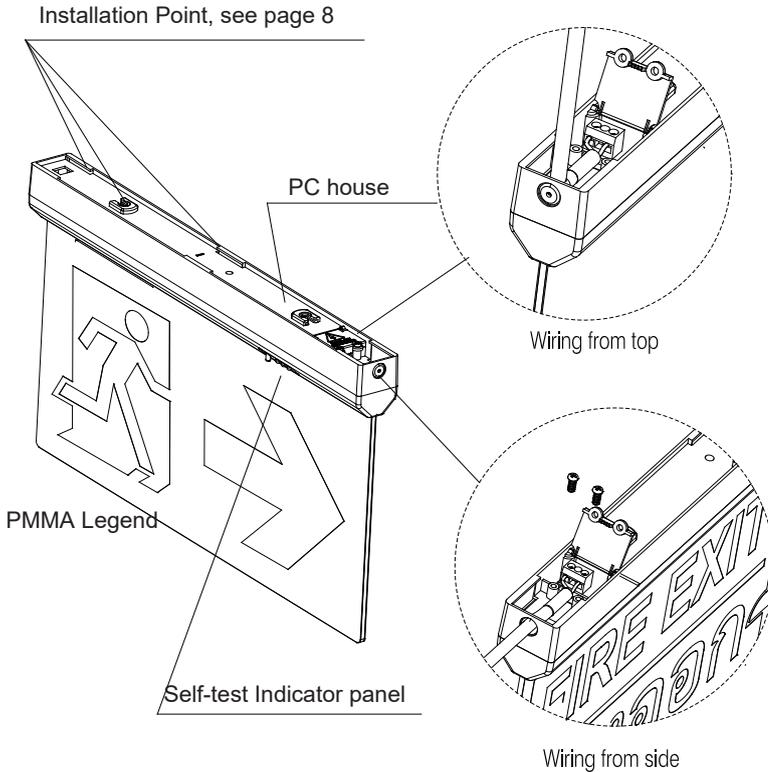

4# . Rest mode & storage

4#.1 This luminaire combined rest mode.

When the AC supply failure / cut down. The EM LED on.

- If the battery over discharged, The luminaire will changeover rest mode automatically.
- You can click the ④ test button. and the luminaire also can changeove rest mode.

4#.2 Storage & transportation

- Make sure the luminaire in rest mode
- Keep the storage temperature 0~30°C
- Keep away from inflammables; keep dry & ventilation.

5 Emergency function & Wiring

ADDITIONAL INFORMATION - COMPONENT REPLACEMENT

- The luminaire contains no user replaceable components other than the battery pack contained in emergency versions.
- The battery has a 4 year service life provided it is operated and maintained by regular testing, as detailed in this User manual. Failure to maintain or change the battery may result in reduced duration in emergency mode.


5.1 Emergency function test before installation

5.1.1. Chose the cable wiring way according page 4.
Connect the AC cable according to the Dia 1.

- The charging indicator on,
- The LED lights on

5.1.2. Press the test button, The charging indicator off, and emergency function on.

5.1.3. Cut off the AC power supply, The Charging indicator off and emergency function on.



Dia 1

6 Installation guide




Caution


1. All OTC emergency lights are designed for projects. Only qualified electrician can install or maintain it.
2. The mains have to be off during the installation or maintenance.
3. Keep the product far from heat sources and in a well ventilated area.



Installation pack



The Wall mounting Accessory



Ceiling mounting Accessory



Hanging mounting Accessory *2







Alligator Anchor*2




4*30 Screws * 2

Install the PVC Legend

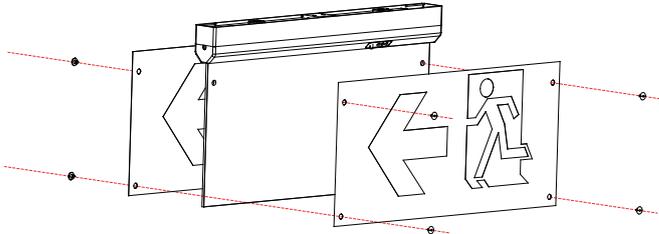


- 1) Chose the right PVC legend.
- 2) Install the legend by clips.

Installation 1: Ceiling mounting

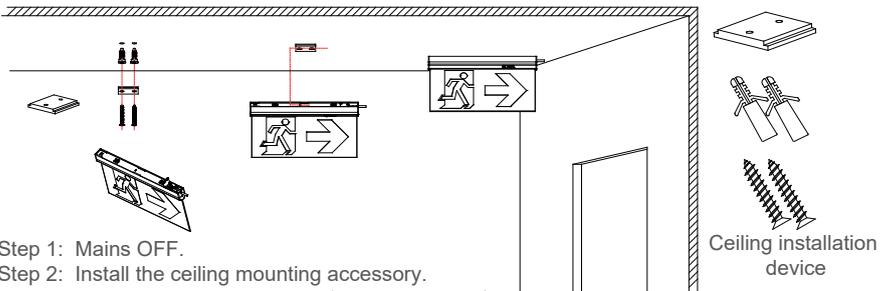


- Step 1: Mains OFF.
- Step 2: Install the ceiling mounting accessory.
Add the auxiliary accessory (see right picture)
If the ceiling is not flat.
- Step 3: Wiring The cable from side hole recommend and testing accoring Page 7
- Step 4: Fix the sign on the ceiling
- Step 5: Mains ON

Installation 2: Side wall mounting


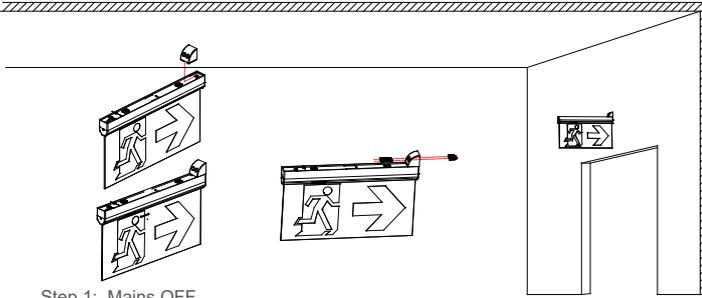


- Step 1: Mains OFF.
- Step 2: Install the wall mounting accessory
- Step 3: Fix the sign on the wall
- Step 4: Wiring and testing accoring Page 7
- Step 5: Mains ON




Installation device

Installation 3: Wall mounting

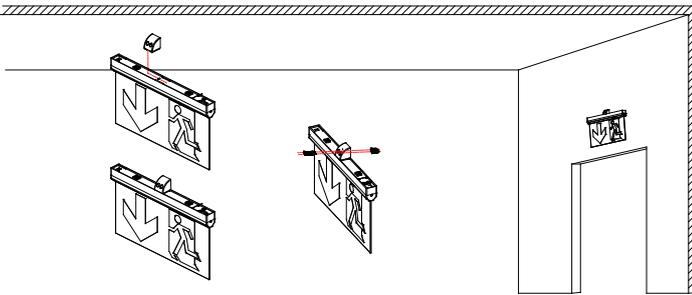


Installation device

Installation 4: Recessed mounting

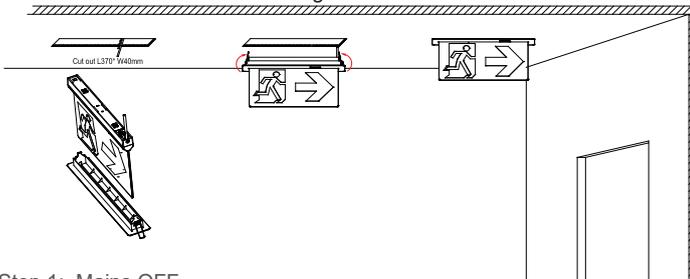


- Step 1: Mains OFF.
- Step 2: Cut the square hole on Ceiling.
- Step 3: Fix the Exit light into the Ceiling accessory
- Step 4: Install the Exit light.
- Step 5: Mains ON



Recessed installation device
(Not included)

Installation 5: Hanging

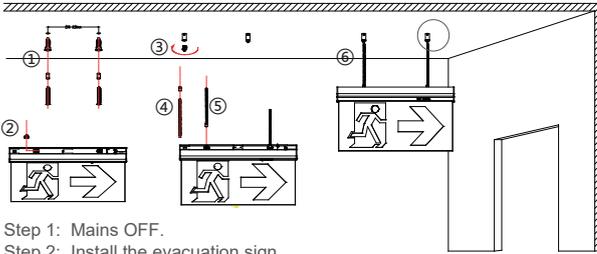


Step 1: Mains OFF.

Step 2: Install the evacuation sign

- ① Install the a) by screws, distance 180-200mm recommend.
- ② Install e) into the base of sign.
- ③ Install b) into a) by screwing.
- ④ Inert the c) string into d) from no stopper side.
- ⑤ Install c)+d) on to e) according the drawing by screwing.
- ⑥ Inert the string into b) set the length accroding Pic8.1.


Step 3: Wiring and testing accoring Page 7

Step 4: Mains ON

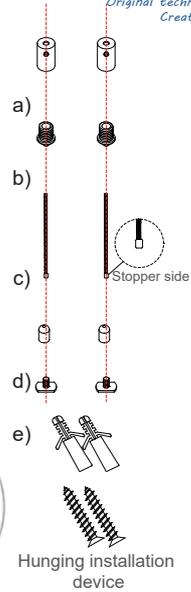

Pic8.1

Installation 5: Hanging with canopy

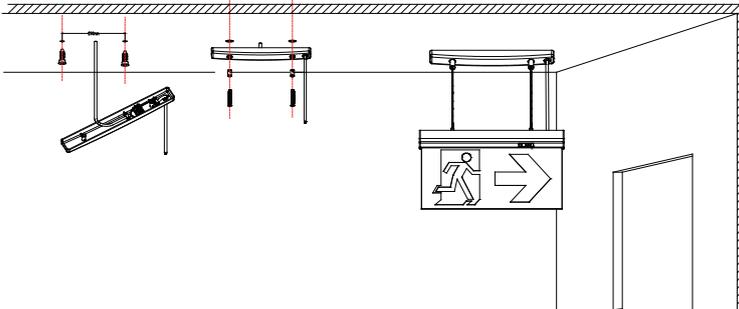

Step 1: Mains OFF.


Step 2: Connect the power cable to canopy.

Step 3: Fix the canopy together with a) of haning accessory to the ceiling by 4*45mm screws

Step 4: Install the ES809 same as ↑ Installation 5 ↑.

Step 5: Wiring and test accoring page 7

Step 6: Mains ON

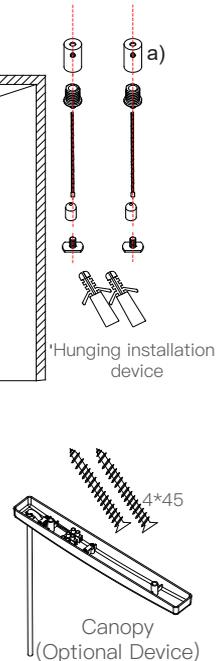

7 EM inspection record table



Luminaire emergency inspection record

| month | Test | First Year | | Second Year | | Third Year | | Fourth Year | | Fifth Year | |
|-------|------------|------------|------|-------------|------|------------|------|-------------|------|------------|------|
| | | Signed | Date | Signed | Date | Signed | Date | Signed | Date | Signed | Date |
| 1 | Functional | | | | | | | | | | |
| 2 | Functional | | | | | | | | | | |
| 3 | Functional | | | | | | | | | | |
| 4 | Functional | | | | | | | | | | |
| 5 | Functional | | | | | | | | | | |
| 6 | 1 hour | | | | | | | | | | |
| 7 | Functional | | | | | | | | | | |
| 8 | Functional | | | | | | | | | | |
| 9 | Functional | | | | | | | | | | |
| 10 | Functional | | | | | | | | | | |
| 11 | Functional | | | | | | | | | | |
| 12 | 3 hours | | | | | | | | | | |

Installed By: Installed Date: Luminaire NO.:

Luminaire Location: Contact details:

8 Cheap solutions DIY



WARNING

1. All OTC emergency lights are designed according to 60598-1 and 60598-2-22:2014 strictly. There is no trouble if you chose OTC products to bid projects, including project acceptance, monthly, annual inspections.

2. If you just need sell them online or install in your home & there is no professional project acceptance inspection, you can chose some cheaper solutions.

| NO. | DIY Items | OTC default Solutions | Cheaper solutions | Dis-advantages |
|-----|-------------------|----------------------------|---|---|
| 1 | MOQ | No MOQ, 1pcs available | 1000Pcs | |
| 2 | Material of house | PC Plastic | ABS | Not fire resist |
| 3 | Battery pack | 3.6V 0.6Ah Ni-Cd | 3.7V Li-ion | 1 years guarantee for Li-ion |
| 4 | EM driver | Isolated | CBB solution | Can not IEC61347-2-7 compliant |
| 5 | Lumen output | Constant brightness | Bright at beginning Waker by the end | Can not IEC60598-2-22:2014, 22.17.1 compliant |
| 6 | Duration time | 180mins | 90mins or others | According local fire department requests |
| 7 | Installation pack | Installation pack in Page2 | Only required installation facilities | Not recommend if sell online. |

OTC only guarantee the EM function of luminaire if DIY !

Please check the requests/ standards with local fire department before making decision.

