

Smart emergency light IP65

Usermanual

For serial: OT-HLB5-RST with telemando



OTC IND CO., LTD

TEL: 0086-575-82913009 | Website: www.otcenterprise.com | Email: info@otcind.net



RoHS



Ni-Cd

Dear partners,

* Thanks for Choosing OTC emergency facilities for your projects.

OTC always pursue high quality, steady quality products, competitive price and one-stop customer service, and offer enjoyable installation experience.

* All the OTC emergency lights with 5 years quality guarantee (Battery 3 years) . If any doubts/ questions, please contact OTC project support team directly by email support@otcind.net . You will get solutions in 7~24 hours rapidly.

Contents

1 Security realated information	2
2 Packing list	2
3 Basic Parameters	3
4 General constructions	4
5 Self & remote test system	5
6 Emergency controll logic	6
7 Maintained & non-maintained changeover	7
8 Test before installation	8
9 Telemando	9
10 Installation guide	10
11 EM inspection record table	12

1 Security related information

- Installation should be carried out in accordance with the latest edition of the I.E.E. Wiring regulations and taking into consideration the latest building regulations.
- Ensure that all electrical connections are tight with no loose strands, including factory made connections.
- Ensure there is adequate free air circulation of at least 100mm around the luminaire. It is the installer's responsibility to consider fire risk and take appropriate precautions.
- A separate enclosure may be required if this unit is to be used in dusty and wet environments.

Q.C. date label, installation in an improper working environment or installation not according to the current edition of the I.E.E. Wiring Regulations . The guarantee is also invalidated if the luminaire has been I.R. tested. Should this product fail during the guarantee period it will be replaced free of charge, subject to correct installation and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected. We reserve the right to alter specifications without prior notice.

2 Packing list



Luminaire *1

Remote controller*1
OT-HLB5-RST only



Installation pack *1



Recess installation pack
Optional



The Legend *1 set




User manual *1





Hanging safety sign
Optional

3 Basic Parameters

Model	Art Nr. OT-HLB5 Self-test & remote Test series
	RST
EM Working mode	Non-maintained and Maintained in one design
Material	100% polycarbonate
LED Chips	15pcs 2835
Input If AC	AC200-240V 50/60HZ
Input if DC	DC 8~40V
Total Input Power	Non-maintained mode: 1.5W / Maintained mode:3.0W
Luminous Flux In AC mode	Non-maintained mode: 0LM / Maintained mode: 100LM
Luminous Flux In EM mode	180Lm
Color Rendering Index	>80
CCT	6000K available
Battery pack	3.6V 1800mAh Ni-Cd pack
Degree of prtction	IP65
Power factor	0.5
Warm up time	<1S
LED lifespan	50,000 hrs
Bean angle	120°
Standard	60598-2-22:2021 & IEC 61347-2-7
Standard of Pictogram	ISO7010 & ISO3864-1/4
TEST	Manual + self + remote test
Telemando Control	± 12V
Charging indicator	Green
Faulty indicator	RED
Guarantee	5 Years (Battery 3 years)

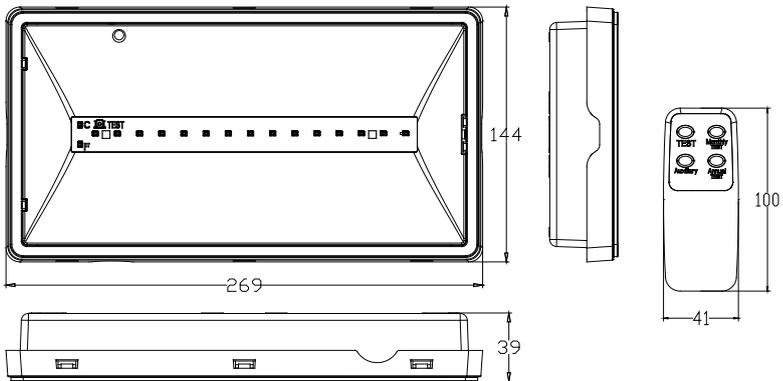

4 General Construction

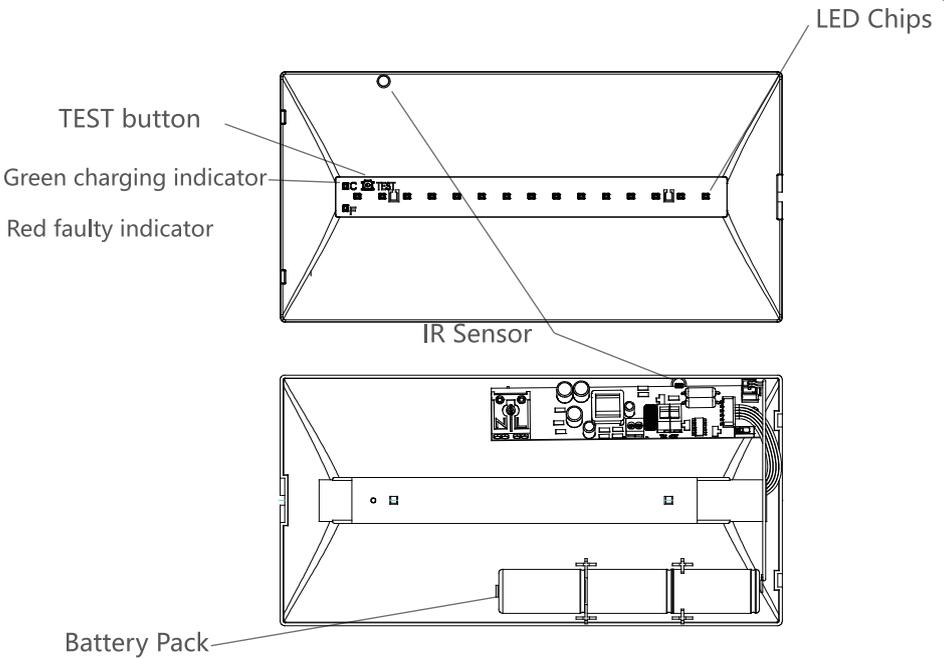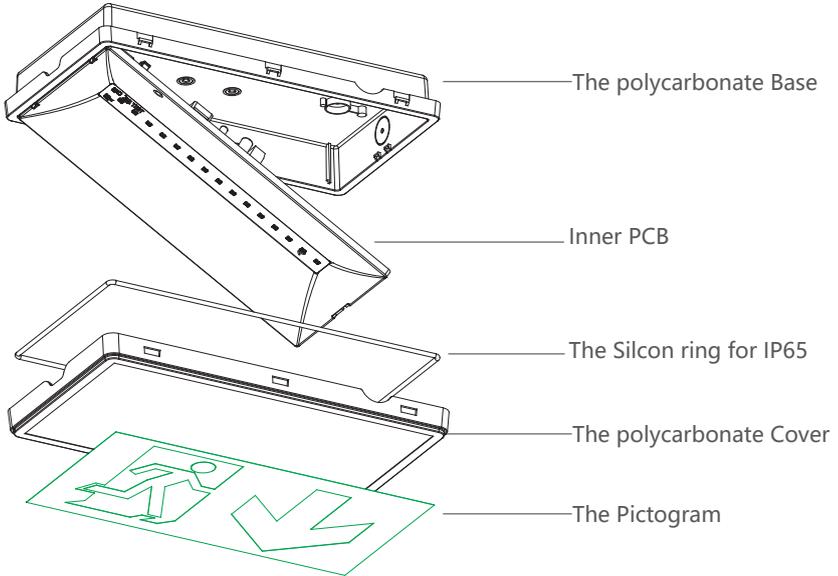

5 Self & remote test system

5.1 Testing (If no failure)

5.1.1. Manual function test.

Active the ④ test button.
or press “TEST” switch on controller.

- a) The ② Charging indicator OFF;
- b) The Emergency function ON;
- c) The test will cut off the mains.

5.1.2 Monthly test.


Active the ④ test button for 5 second;
or press the “Monthly TEST” switch on controller;
or the lamp installed every 30 days.

- a) The ② Charging indicator will flash in 1Hz for 128s;
- b) The Emergency function ON;
- c) The test finished and back to standby mode.

5.1.3 Annual test.

Active the ④ test button for 7 second;
or press the “Annual TEST” switch on controller;
or the lamp installed every 180 days.

- a) The ② Charging indicator will flash in 2Hz for 3hours;
- b) The charging will be cut off & emergency function ON 3hours;
- c) The lamp back to standby mode after test.

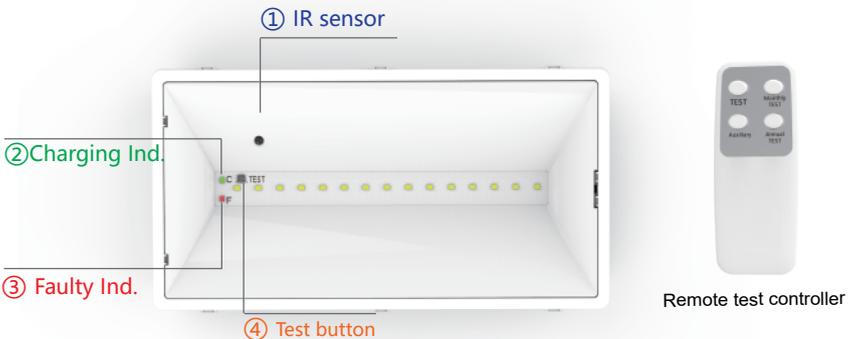

5.2 Testing (If any failure)

5.2.1 Battery failure: Monitored constantly. The ③ faulty indicator will flash in 1 Hz if the battery failure any time.


5.2.2 LED load failure: If press test button, or the luminary self-monthly test. The ③ faulty indicator will flash in 2 Hz if LED load failure.

5.2.3 Duration failure: Only in Annual self-test. The ③ faulty indicator will turn on constantly if the Battery can not last 3 hours

6 Emergency control logic

The emergency function control logic

Operation	Charging indicator (Green)		Faulty Indicator (RED)		Emergency LED Maintained mode		Emergency LED Non-Maintained mode	
	1 Second	1 Second	1 Second	1 Second	1 Second	1 Second	1 Second	1 Second
Normal charging	Constantly on		OFF		Constantly on		OFF	
Normal AC Failure	OFF		OFF		Constantly on		Constantly on	
Manual test	OFF		OFF		Constantly on		Constantly on	
Monthly self-test			OFF		Constantly on		Constantly on	
Annual self-test			OFF		Constantly on		Constantly on	
Battery circuit failure	OFF				Constantly on		OFF	
Light source failure	Constantly on				OFF		OFF	
Duration test failure	Constantly on		Constantly on		Constantly on		OFF	

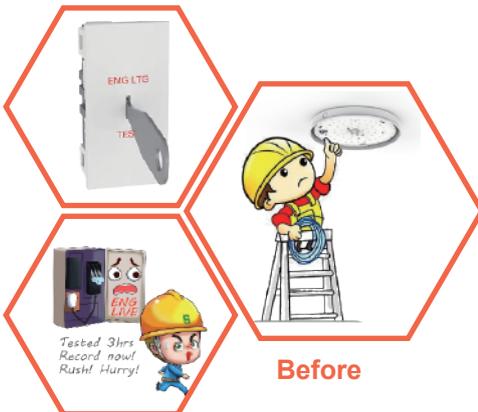


Before



After

No Key switch, No Harry, No ladders
Safe / Easy / Convenient

7 Maintained and non-maintained changeover

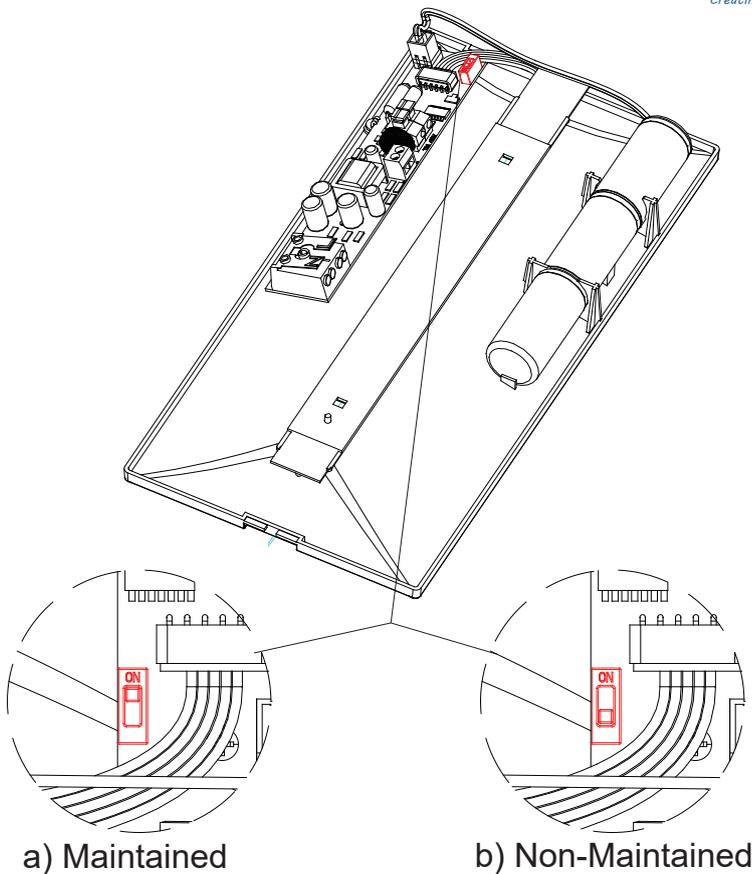

Maintained & Non-maintained work mode

The OT-HLB5 series can work both in maintained and non-maintained mode.



a) Dip switch ON. It works in maintained mode;



b) Or it works in non-maintained mode.



8 Test before installation

ADDITIONAL INFORMATION - COMPONENT REPLACEMENT



- The luminaire contains no user replaceable components other than the battery pack contained in emergency versions.
- The battery has a 4 year service life provided it is operated and maintained by regular testing, as detailed in this User manual. Failure to maintain or change the battery may result in reduced duration in emergency mode.

Emergency function test before installation

1. Connect the AC cable according to the Dia 1.
Or connect DC 12V cable according to Dia 2.
Keep battery plugged on.
Set Maintained /non-maintained mode according Page 7.
2. AC Supply on
The Charging Indicator On, The faulty Indicator Off
The EM LED On if set maintained mode in step1 .
OFF if set Non-maintained mode in step1 .
3. Press the test button, The charging indicator off, and EM LED on.
4. Unplugged the battery,
Charging indicator OFF,
Faulty indicator flash in 1Hz.

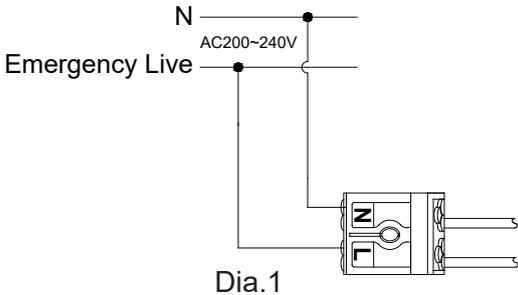

9 Telemando wiring

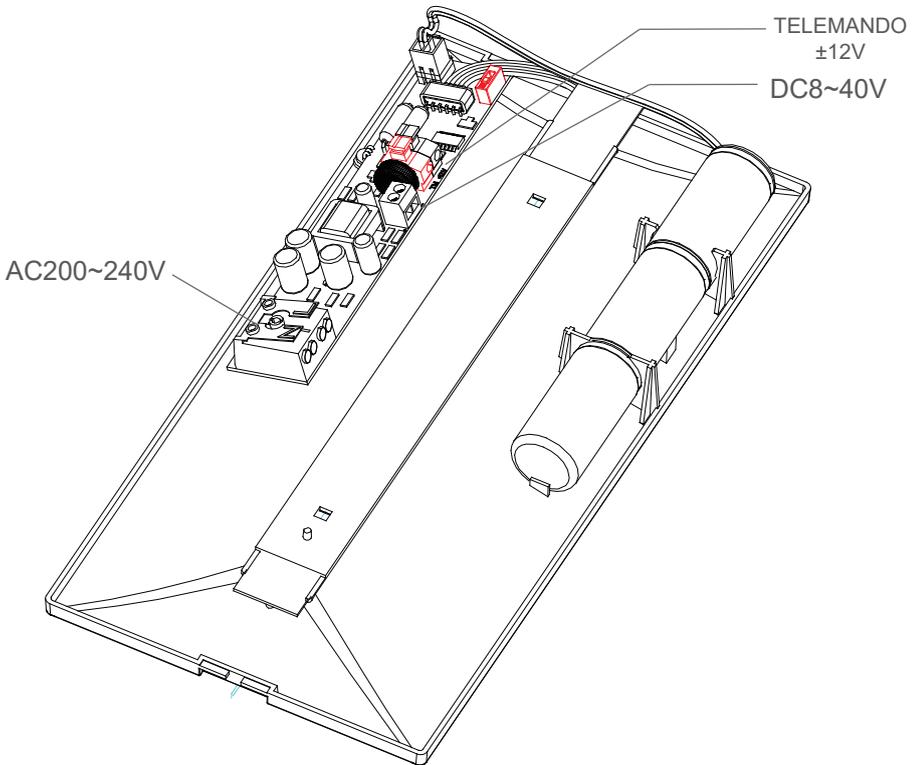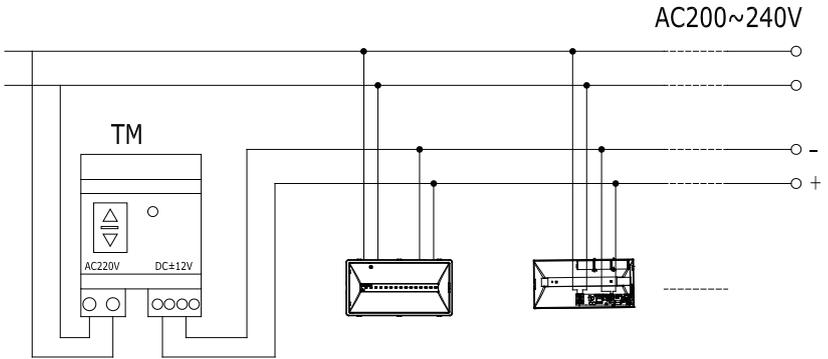


10 Installation guide




Caution

1. All OTC emergency devices are designed for projects. Only qualified electrician can install or maintain them.
2. The mains have to be off during the installation or maintenance.


10.1 Ceiling / wall mounting

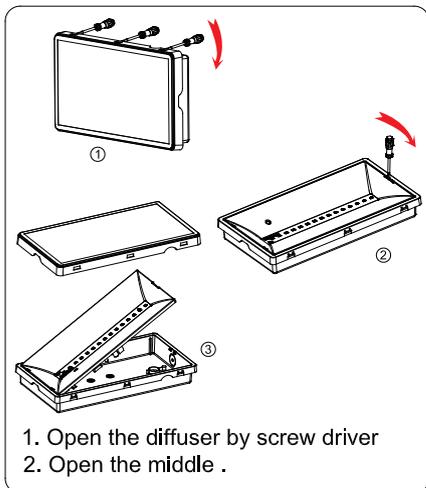


Step 1

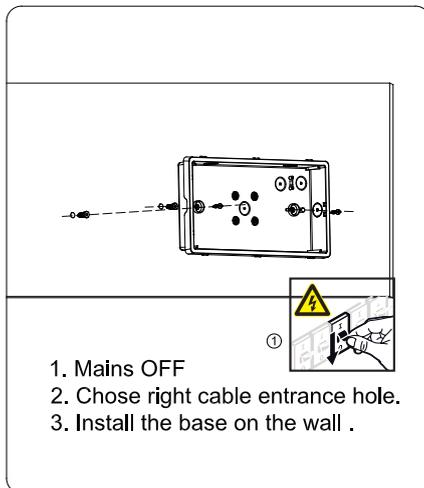

Step 2

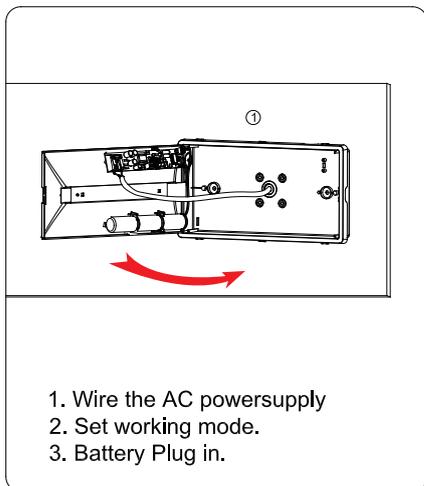


Step 3

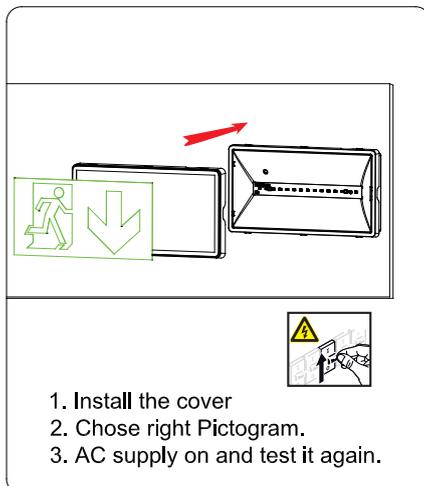


Step 4

10.2 Recessed mounting

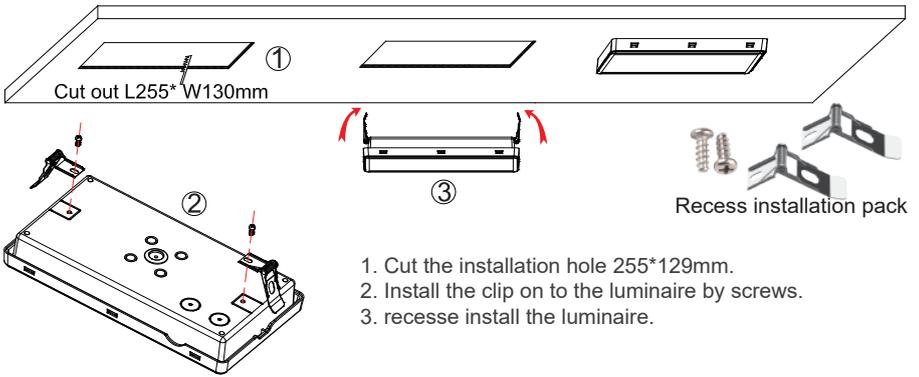

1. Cut the installation hole 255*129mm.
2. Install the clip on to the luminaire by screws.
3. recess install the luminaire.

10.3 Install as exit sign

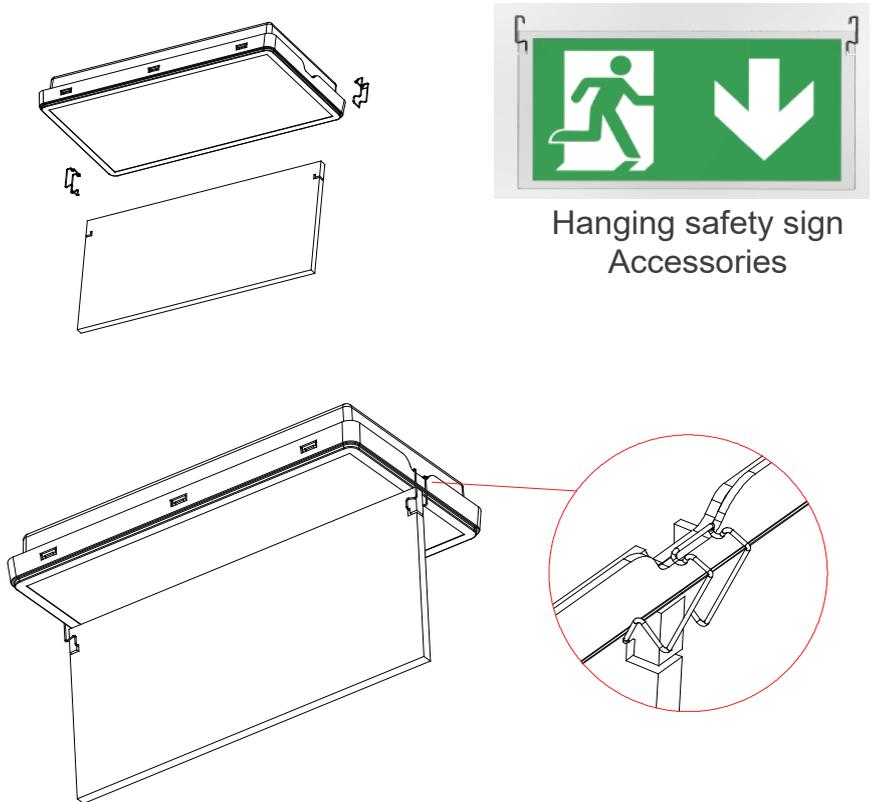

Luminaire emergency inspection record

month	Test	First Year		Second Year		Third Year		Fourth Year		Fifth Year	
		Signed	Date	Signed	Date	Signed	Date	Signed	Date	Signed	Date
1	Functional										
2	Functional										
3	Functional										
4	Functional										
5	Functional										
6	1 hour										
7	Functional										
8	Functional										
9	Functional										
10	Functional										
11	Functional										
12	3 hours										

Installed By: Installed Date: Luminaire NO.:

Luminaire Location: Contact details: